


Surface Temperature Sensor

Improve the performance of your surface thermometer with an accurate Class-A PT100 Surface Sensor in a practical housing.

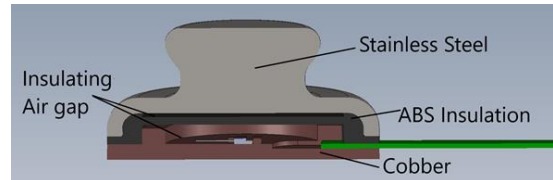

Product features

- For use with a variety of older instruments such as WIKA F100, Dostmann P750/755/795 etc.
- Class A Platinum sensor
- Cobber bottom for best heat transfer to sensor.
- Air gap between sensor and top for insulation
- Stainless steel top applies weight for good thermal contact to surface.
- Thin flexible cable minimizes disturbance of target.
- Made in Denmark
- Delivered with or without accredited calibration

Technical Data

Size	Ø: 35 mm Height: 12 mm
materials	Top: Stainless Steel Mid Isolation: ABS Bottom conductor: Cobber
Cable length	120cm
Cable dimensions	Width: 6,35 mm Height: 0,64 mm
Connector	Customer specific
Working temperature	-20°C...+50°C
Accuracy	±0,03°C from -20°C...+50°C when used with Nilotech P755

Order Number: 113s002

Nilotech Aps.- Tower 77 – Vandtaarnsvej 77 - DK-2860 Soeborg – Denmark – VAT: DK 38584863

T: +45 30 32 32 96 – email: nsh@nilotech.dk

Bank: Jyske Bank Denmark - SWIFT/BIC Code: JYBADKKK

Account No: 5030 1302860 IBAN DK3750300001302860