

PT120

## Platinum 1 mm Flexible Temperature probe

The PT120 represents a significant advancement in temperature sensing technology. Its platinum construction ensures high accuracy and stability, making it ideal for precision measurement needs. The compact design allows for easy integration into a variety of systems without disturbance, and the quick response time enables real-time monitoring and control.



### Functions & Technology

#### Ideal temperature probe for narrow openings down to 1 mm in diameter

The industry standard PT-100 sensor is precise and stable over a wide temperature range.


PT120 is also particularly useful for controlling heated stages inside dishes and other sensitive heated devices. The probe can be placed on any surface, such as metal, glass, plastic etc.

The probe can also be useful to measure liquids provided that it is placed inside a water-tight pouch.

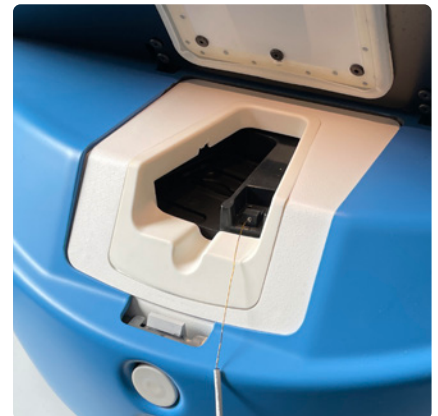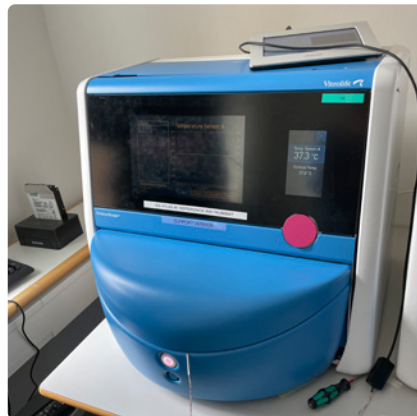

### Specifications

<b>Sensor type</b>	Analog PT-100 temperature sensor (3 wire)
<b>Measure range &amp; accuracy</b>	-50 - 50 °C/0,03 °C accuracy possible
<b>Display resolution and update</b>	0,01 °C, one update per second
<b>T90 (min:sec)</b>	0:25
<b>Compliance</b>	ISO/EN61010-1 • RoHS • CE with NiloChecker 500
<b>Operating conditions</b>	0 - 50 °C/5 - 95% RH
<b>Cable length</b>	2 m
<b>Materials</b>	Stainless steel tip, polyamide and Teflon coated connection wires, PVC cable
<b>IP Class</b>	IP50
<b>Calibration</b>	Delivered with factory calibration certificate. Accuracy $\pm 0,1$ °C in the range 0 - 50 °C PT120 can be calibrated in accordance with ISO/IEC 17025

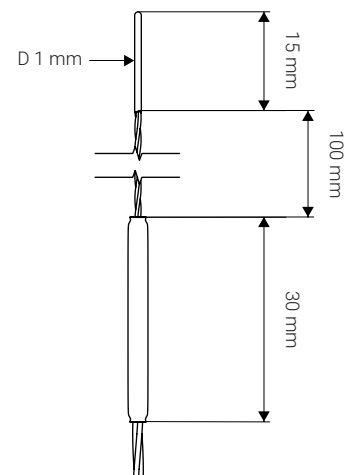

#### Ordering info

**Part no: 120s002** - PT120 Platinum 1 mm Flexible Temperature Probe  
**Part no: 800s012/800s013 AC** - Accredited calibration of 1 temperature sensor  
**Part no: 800s012** - Factory calibration of PT probe in 3 points

### Nilotech ApS

Knudstrupvej 14 - DK-4270 Hoeng, Denmark  
 +45 30 32 32 96 - contact@nilotech.eu - www.nilotech.eu